
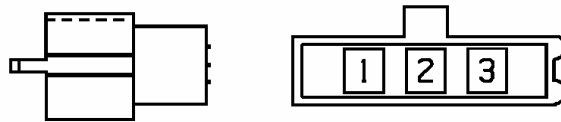


Motorcycle Manufacturer	 YAMAHA
Model	BULLDOG
Issue	03/02 Rev. 00


This model is originally equipped with three plugs for the connection of a security system.

Recommended siting	Fit the alarm unit inside the tool compartment under the seat, over the battery.
Position of the o.e. plugs	Behind the tail lamp, under the parcel rack. IMPORTANT: remove the original jumper connectors !

Connect as detailed herebelow. The plugs are viewed from the back side (wire side):



Pin n.	Function	Connect to alarm wire
1	Main positive supply + 12V	Red
2	Ignition controlled positive supply + 15	Orange
3	Negative supply	Black

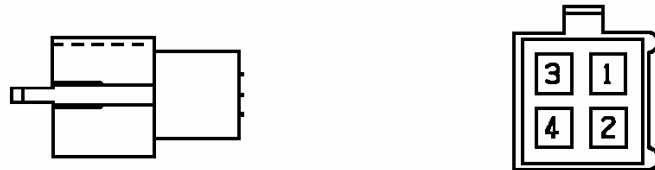

Pin n.	Function	Connect to alarm wire
1	Engine immobilisation (starter solenoid)	Green/White
2	Flashing of left turn indicator	Yellow
3	Engine immobilisation (starter solenoid)	Green/White
4	Flashing of right turn indicator	Yellow



Pin n.	Function	Connect to alarm wire
1	Engine immobilisation	Violet
3	Engine immobilisation	Brown

To avoid backfeeds through the turn indicators, it is recommended to fit a diode to the BROWN wire found in the 3-way plug that is connected to the flasher unit, under the left fairing, over the attachment of the pillion's footrest.

